
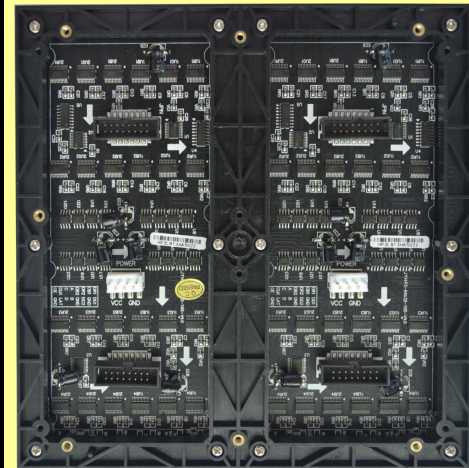


P3

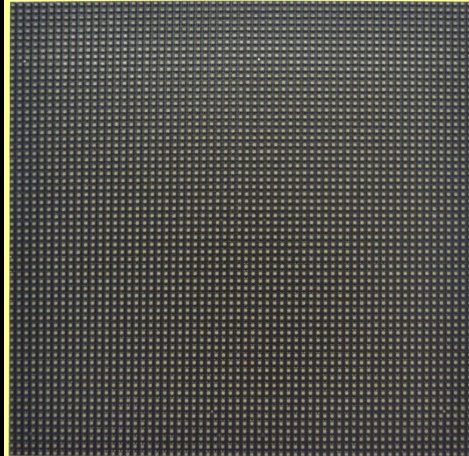

Specification		
Size:192mm×192mm		
LED color:1R1G1B 3in1 led 2121		
Module Power Consumption 6A / 30W		
Constant Current Drive:1/32Scan IC MBI5124/SM16016		
RLED Epistar{350-400CD} Wavelength625±2nm		
GLED Epistar{6500--750CD} Wavelength520±2nm		
BLED Epistar{200--300CD} Wavelength470±2nm		
Weight0.29kg		
Module Thickness 1.5CM		
Brightness 1200CD		
Module Pixel 64×64=4096 Dot Pixel 3mm		
LEDAngle Horizontal≥140° Vertical≥140°		
Connector: HUB75		
Color Ratio: R:G:B/3:6:1		
Warranty	Use Life 100000Hrs	
	Warranty 2 Year	
Screen Parameter	Brightness, automatic adjust by sensors	
	Continuous working time≥48hrs	
	Dot/sqm	Pixel 11111 dot
	Best view distance 3m--60m	
	Average Power consumption 400W/㎡	
	ValtageAC220V±10%	
Video Signal	RF、S-Video、RGB、RGBHV、YUV、YC、COMPOSITION	
Packing		
Power cable 45CM by 2		Flat cable 20CM
Carton Size 43*34.8*42		Volume 0.08CBM
Weight 22.3kg		QTY/CTN 64PCS/CTN
		27.13PCS/SQM